


Helsinki 3.11.1999



EP 99/8087

ETUOIKEUSTODISTUS  
PRIORITY DOCUMENT

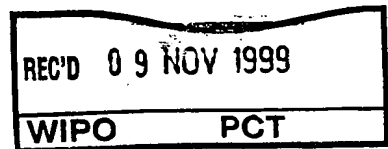

Hakija  
Applicant

Oy L M Ericsson Ab  
Kirkkonummi

9

Patenttihakemus nro  
Patent application no

982335

Tekemispäivä  
Filing date

27.10.1998

Kansainvälinen luokka  
International class

H04L

Keksinnön nimitys  
Title of invention

"Packet Switched Networks"  
(Pakettikytkentäiset verkot)

**PRIORITY  
DOCUMENT**

SUBMITTED OR TRANSMITTED IN  
COMPLIANCE WITH RULE 17.1(a) OR (b)

Hakemus on hakemusdiaariin 14.01.99 tehdyn merkinnän mukaan  
siirtynyt Telefonaktiebolaget L M Ericsson nimiselle yhtiölle,  
Stockholm, Sweden.

The application has according to an entry made in the register  
of patent applications on 14.01.99 been assigned to  
Telefonaktiebolaget L M Ericsson, Stockholm, Sweden.

Täten todistetaan, että oheiset asiakirjat ovat tarkkoja jäljennöksiä  
patentti- ja rekisterihallitukselle alkuaan annetuista selityksestä,  
patenttivaatimuksista, tiivistelmästä ja piirustuksista.

This is to certify that the annexed documents are true copies of the  
description, claims, abstract and drawings originally filed with the  
Finnish Patent Office.

*Pirjo Kaila*  
Pirjo Kaila  
Tutkimussihteeri

Maksu 300,- mk  
Fee 300,- FIM

1

2

## Packet Switched Networks

### Field of the Invention

5 The present invention relates to packet switched  
networks and more particularly to the transmission of  
real time voice and data information over a packet  
switched network.

### 10 Background to the Invention

Conventional telecommunications networks for conveying  
voice and other user information have in general relied  
upon dedicated telecommunications network infrastructure  
15 and transmission protocols. However, with the recent  
explosive growth in digital data transmission, driven in  
particular by the use of intranets and the Internet,  
there has been a move towards the use of more generic  
infrastructure and transmission protocols in the  
20 telecommunications industry. This move is driven  
primarily by the desire for interoperability between  
telecommunications networks and other data networks, and  
secondarily by the cost and performance advantages which  
general data network systems offer over conventional  
25 telecommunications systems.

There exist proposals for the replacement of certain  
parts of telecommunications networks with packet  
switched networks and in particular with Internet  
30 Protocol (IP) networks. For example, telephone  
exchanges may be interconnected via IP networks for the  
purpose of carrying both signalling and user voice and  
data information.

35 Subscriber telephone terminals in a Public Switched  
Telephone Network (PSTN) are generally connected to

respective local exchanges via two-wire connections which provide for duplex (i.e. bidirectional) communication. A so-called "hybrid" located at the local exchange converts the bidirectional voice signals from the two-wire lines into unidirectional signals for transmission over four-wire lines used in the inter-exchange trunk connections. Imperfections in the hybrids may allow leakage of signals back to a speaker's telephone from where the signals originated, giving rise to the perception of an echo.

In conventional networks, the problem of echo is reduced by including an echo cancellation device in a telephone circuit if the propagation delay over the circuit exceeds some predefined period (e.g. 15msec). As the route taken by a telephone circuit is not always predefined, the first exchange in the circuit identifies the "statically" defined delay for next leg and forwards this to the exchange at the end of that leg. The receiving exchange then appends the delay for the next leg to the already accumulated delay and forwards this to the next exchange and so on. When the accumulated delay exceeds the predefined period, a backward message is sent to the originating exchange asking for an incoming or outgoing echo cancellation device to be included in the circuit.

The above process works because in conventional telephone circuits, which use circuit switched traffic channels, the propagation delay over a circuit leg can be predicted with great accuracy. The proposal to transmit telephone voice data between exchanges using a packet switched network upsets this situation as by its very nature packet switched circuits are unpredictable. Unpredictability arises both because a packet may be transmitted between two end points by one of several

different routes and because the network uses only a  
"best effort" to transmit a packet, i.e. if the network  
is busy a packet may have to wait or may indeed be lost.  
The propagation delay over a circuit link provided by a  
5 packet switched network cannot therefore be statically  
defined.

### Summary of the Present Invention

- 10 It is an object of the present invention to overcome or  
at least mitigate the above noted disadvantages of using  
packet switched networks in telecommunication networks.  
It is a further object of the present invention to  
provide a telecommunication network in which the  
15 propagation delay for voice data sent over a packet  
switched network can be dynamically determined for the  
purposes of echo cancellation.

According to a first aspect of the present invention  
20 there is provided a method of determining the  
propagation delay over a packet switched network  
intended to provide a segment of a telephone circuit for  
carrying information between at least two subscriber  
terminals, the method comprising:

- 25 reacting to a request for a telephone circuit  
between said two subscribers by transmitting a packet  
containing an echo request message over the packet  
switched network from a first network node to a second  
network node;  
30 reacting to receipt of the echo request message at  
the second network node by transmitting a packet  
containing an echo reply message over the packet  
switched network from the second network node to the  
first network node; and  
35 and determining the round trip propagation delay  
for the packet switched network segment on the basis of

the time which elapses between sending the echo request message from the first node and receiving the echo reply message also at the first node.

- 5 Preferably, the propagation delay for the packet switched network segment is determined prior to the sending of an Initial Address Message (IAM) over the packet switched network segment. More preferably, the determined round trip delay is appended or added to
- 10 delays determined for preceding circuit segments defined in the IAM, for transmission over the packet switched network.

- 15 Preferably, the method described above is employed with an IP network.

- According to a second aspect of the present invention there is provided apparatus for determining the propagation delay over a packet switched network
- 20 intended to provide a segment of a telephone circuit for carrying information between at least two subscriber terminals, the apparatus comprising:

- a first packet switched network node coupled between a first subscriber and the packet switched
- 25 network and arranged to react to a request for a telephone circuit between said two subscribers by transmitting a packet containing an echo request message over the packet switched network to a second packet switched network node;

- 30 the second node being arranged to react to receipt of the echo request message by transmitting a packet containing an echo reply message over the packet switched network to the first network node; and

- processing means associated with the first network
- 35 node arranged to determine the round trip propagation delay for the packet switched network segment on the basis of the time which elapses between sending the echo

request message from the first node and receiving the echo reply message also at the first node.

## 5 Brief Description of the Drawings

For a better understanding of the present invention and in order to show how the same may be carried into effect reference will now be made, by way of example, to the accompanying drawings, in which:

Figure 1 shows schematically a telecommunications system incorporating an IP network; and

Figure 2 is a flow diagram showing a part of a call set-up phase in the system of Figure 1.

15

## Detailed Description of Certain Embodiments

There is illustrated in Figure 1 a telephone system in which a pair of subscriber telephone terminals 1,2 are connected to respective local access exchanges 3,4 via PSTN access networks. The access exchanges 3,4 are in turn connected to respective IP gateway nodes 5,6 via an ISUP (ISDN User Part) interface. Interconnection between the gateway nodes 5,6 is provided via an IP network 7 which may be the Internet or, as is more likely, a closed network employing the TCP/IP protocol.

It will be appreciated that the example shown in Figure 1 is greatly simplified and the system may include one or more transit exchanges connecting the local access exchanges 3,4 to the IP gateway nodes 5,6. Moreover, the connection between the subscriber terminals 1,2 and the access exchanges 3,4 may be made via one or more intermediate "routers". It will also be appreciated that the IP network 7 comprises a number of interconnected routers such that the path taken by a

Claims

1. A method of determining the propagation delay over  
a packet switched network intended to provide a segment  
5 of a telephone circuit for carrying information between  
at least two subscriber terminals, the method  
comprising:

reacting to a request for a telephone circuit  
between said two subscribers by transmitting a packet  
10 containing an echo request message over the packet  
switched network from a first network node to a second  
network node;

reacting to receipt of the echo request message at  
the second network node by transmitting a packet  
15 containing an echo reply message over the packet  
switched network from the second network node to the  
first network node; and

and determining the round trip propagation delay  
for the packet switched network segment on the basis of  
20 the time which elapses between sending the echo request  
message from the first node and receiving the echo reply  
message also at the first node.

2. A method according to claim 1 and comprising  
25 determining the propagation delay for the packet  
switched network segment prior to the sending of an  
Initial Address Message (IAM) over the packet switched  
network segment.

30 3. A method according to claim 2 and comprising  
appending or adding the determined round trip delay to  
delays determined for preceding circuit segments and  
defined in the IAM, for transmission over the packet  
switched network.

4. A method according to any one of the preceding claims wherein the packet switched network is an IP network.

5. Apparatus for determining the propagation delay over a packet switched network intended to provide a segment of a telephone circuit for carrying information between at least two subscriber terminals, the apparatus comprising:

10 a first packet switched network node coupled between a first subscriber and the packet switched network and arranged to react to a request for a telephone circuit between said two subscribers by transmitting a packet containing an echo request message  
15 over the packet switched network to a second packet switched network node;

the second node being arranged to react to receipt of the echo request message by transmitting a packet containing an echo reply message over the packet  
20 switched network to the first network node; and

processing means associated with the first network node arranged to determine the round trip propagation delay for the packet switched network segment on the basis of the time which elapses between sending the echo  
25 request message from the first node and receiving the echo reply message also at the first node.



## Abstract (57)

A method of determining the propagation delay over a packet switched network intended to provide a segment of a telephone circuit. In response to a request for a telephone circuit between two subscribers, a packet containing an echo request message is transmitted over the packet switched network from a first network node to a second network node. The second network node reacts to receipt of the echo request message by transmitting a packet containing an echo reply message to the first network node. The first network node then determines the round trip propagation delay for the packet switched network segment on the basis of the time which elapses between sending the echo request message from the first node and receiving the echo reply message also at the first node.

Fig. 1

13  
1/1

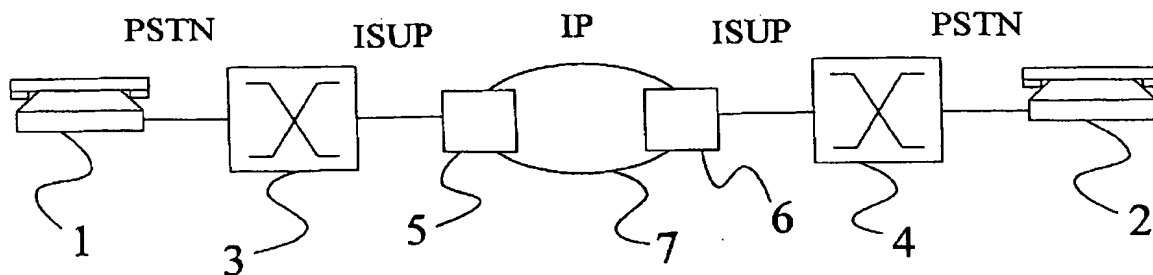


Figure 1

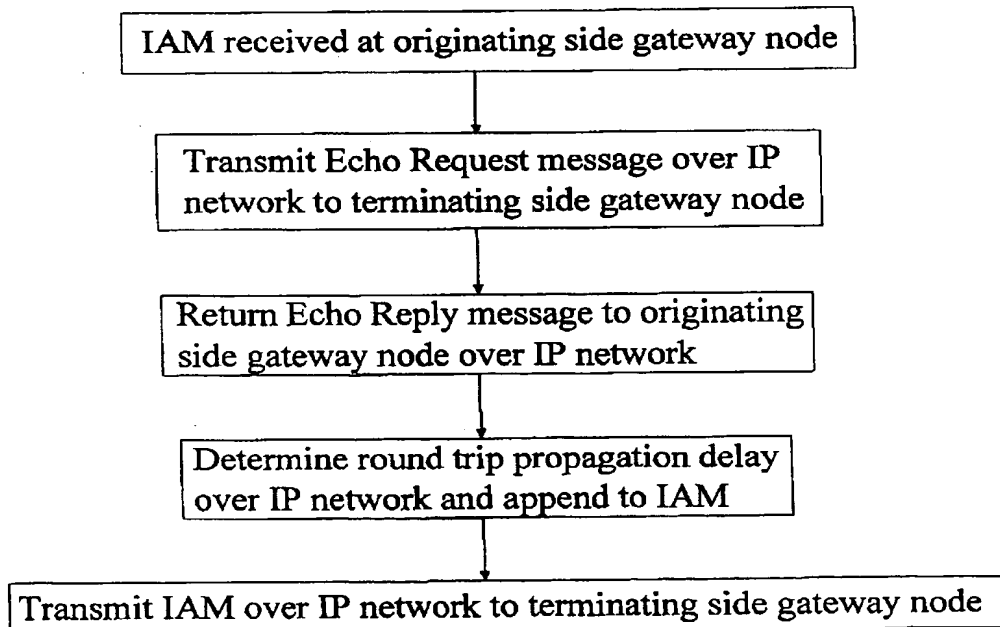


Figure 2